

# SEA

## SERIES- Ø150mm

标准型 防爆型 警示灯 Standard Size, Explosion-Proof Warning Light

### 长距离可见度优秀的通用内压防爆产品!

#### SEA | 防爆型 灯泡 反射镜旋转 警示灯

Explosion Proof Bulb Revolving Warning Light



SEA

#### SEALR | 防爆型 LED 反射镜旋转 警示灯

Explosion Proof LED Revolving Warning Light




SEALR

### 灯泡 反射镜旋转型 通用产品

- 灯泡 反射镜旋转型
- 内装可以调节速度的旋钮，转速：120~140RPM
- 材质：内部灯罩-PC，身体-DIECAST Al，反射镜-耐热性 ABS 灯罩-防爆钢化玻璃，保护网-SUS316L
- 技术认证：KOSHA, KIMM, KR, ABS, ATEX, NEPSI
- 保护等级：KIMM, KOSHA, NEPSI - Ex d II C T6, IP66  
ATEX - Ⓜ II 2G Exd IIBT6, IP66  
温度范围：-40°C ≤ Tamb ≤ +60°C  
额定：12VDC, 24VDC, 230VAC
- Bulb reflector revolving type
- Employing built-in controller for revolving speed volume, RPM:120-140
- Material : Filter-PC, Body-DIECAST Al, Reflector-PC, Lens-Explosion-proof tempered glass, Protection cage-SUS316L
- Certificate : ATEX, KOSHA, KIMM, KR, ABS, ATEX
- Explosion-proof class : KIMM, KOSHA, NEPSI - Exd IIBT6, IP66  
ATEX - Ⓜ II 2G Exd IIBT6, IP66  
Ambient temperature range : -40°C ≤ Tamb ≤ +60°C  
Ratings : 12VDC, 24VDC, 230VAC

型号 Model	电压 Rated Voltage	电流 Current	灯泡 Bulb		重量 Weight	颜色 Color
SEA	DC12V	1.155A	12V15W	G23 15S	17 3.68Kg	■ 红-R ■ 黄-A ■ 绿-G ■ 蓝-B
	DC24V	0.766A	24V15W	G23 15S	18 3.68Kg	
	AC110V	0.204A	110V15W	G23 15S	17 4.05Kg	
	AC220V	0.102A	220V15W	G23 15S	18 4.05Kg	

#### 外形图 (External view drawing)

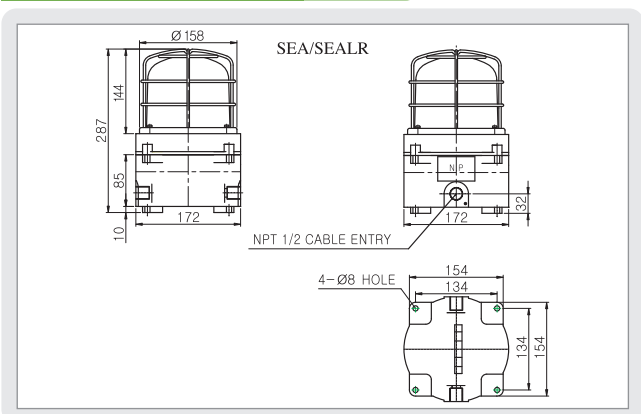

### 特许认证 LED 反射镜旋转型 防爆产品

- 大功率发光二极管反射镜旋转型
- 发挥跟灯泡反射镜旋转型一样的散光效果
- 材质：内部灯罩-PC，身体-DIECAST Al，反射镜-耐热性 ABS 灯罩-防爆钢化玻璃，保护网-SUS316L
- 技术认证：KOSHA, KIMM, KR, ABS, ATEX, NEPSI
- 保护等级：KIMM, KOSHA, NEPSI - Ex d II C T6, IP66  
ATEX - Ⓜ II 2G Exd IIBT6, IP66  
温度范围：-40°C ≤ Tamb ≤ +60°C  
额定：12VDC, 24VDC, 230VAC
- High brightness LED reflector revolving warning light.
- Aluminium housing explosion-proof product with excellent durability and anti corrosion.
- Suitable for dangerous place such as petrochemical plant, powder plant, gas station where exists possibility of explosion.
- Material : Filter-PC, Body-DIECAST Al, Reflector-Heat resisting ABS, Lens-Explosion-proof tempered glass, Protection cage-SUS316L
- Certificate : ATEX, KOSHA, KIMM, KR, ABS, ATEX
- Explosion-proof class : KIMM, KOSHA, NEPSI - Exd IIBT6, IP66  
ATEX - Ⓜ II 2G Exd IIBT6, IP66  
Ambient temperature range : -40°C ≤ Tamb ≤ +60°C  
Ratings : 12VDC, 24VDC, 230VAC

型号 Model	电压 Voltage	电流 Current	重量 Weight	转速 RPM	颜色 Color
SEALR	DC12V	0.183A	1.25Kg	120~140	■ 红-R ■ 黄-A ■ 绿-G ■ 蓝-B
	DC24V	0.127A	1.25Kg		
	AC110V	0.035A	1.64Kg		
	AC220V	0.017A	1.64Kg		

- 防爆填料函是用户要求订购提供。
- 电源线 引入口 规格：NPT 1/2
- 引入口规格 NPT3/4 可以定做
- Explosion-proof cable gland is custom made.
- Power entry standard : NPT 1/2
- Entry size NPT 3/4 is custom-made.

#### SEA/SEALR 产品指定 (Order Specification)

SEA	220	R
型号 (Model)	电压 (Voltage)	颜色 (Color)
• SEA	• 12-DC12V	■ R-红 (Red)
• SEALR	• 24-DC24V	■ A-黄 (Amber)
	• 110-AC110V	■ G-绿 (Green)
	• 220-AC220V	■ B-蓝 (Blue)

※ ATEX 防爆认证产品是定做产品  
 ※ ATEX Certified product is custom-made.